

Please contact our technical department or use the free calculation services in the service section of our website: <https://www.eurotec.team/en/service>

Contact

Trader:	_____	Contractor:	_____
Contact Person:	_____	Contact Person:	_____
email:	_____	Phone:	_____
Project:	_____	email:	_____

Project details

Main Beam

Width: _____ mm

Height: _____ mm


Strength class: _____
(e.g. C24, GL24h etc.)

Secondary Beam

Width: _____ mm

Height: _____ mm

Strength class: _____
(e.g. C24, GL24h etc.)

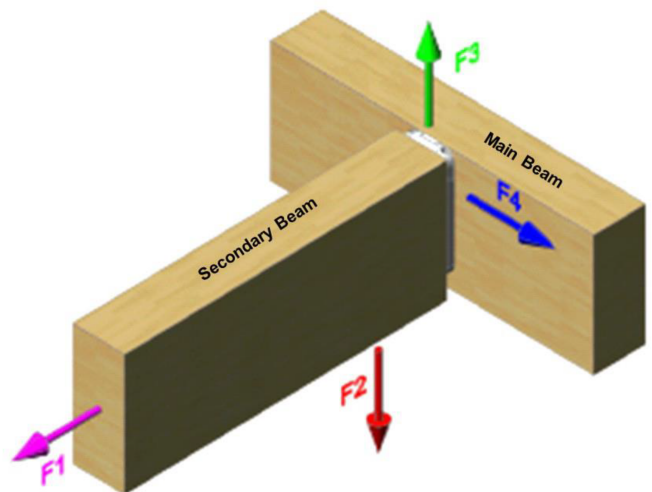

F1	- Proportion of permanent load: _____ kN
	- Proportion of variable load: _____ kN
F2	- Proportion of permanent load: _____ kN
	- Proportion of variable load: _____ kN
F3	- Proportion of permanent load: _____ kN
	- Proportion of variable load: _____ kN
F4	- Proportion of permanent load: _____ kN
	- Proportion of variable load: _____ kN

Loads (Characteristic values)

Load duration class

Permanent Long Medium Short

Installation

Surface assembly

Embedded in secondary beam

Embedded in main beam

Selection of Magnus

XS 30 x 30 S 50 x 60/80/100 M 70 x 120/140/160/180 L 110 x 220/260/300/340/380/580