

Wood-concrete composite structure TopConcrete

by phone 02331 6245-444 · by fax to 02331 6245-200 · by email to technik@eurotec.team

Contact our Technical department or use the free calculation software in the Service area on our homepage: <https://www.eurotec.team/en/service>

Contact

Retailers: _____

Executing party: _____

Contact person: _____

Contact person: _____

Email: _____

Tel: _____

Building project: _____

Email: _____

Information about the supporting structure


h (mm): _____
(Height of the wooden beam)

w (mm): _____
(Width of the wooden beam)

a (mm): _____
(Largest centre-to-centre distance of the wooden beam)

l (mm): _____
(Span clearance)

s (mm): _____
(Formwork thickness if present)

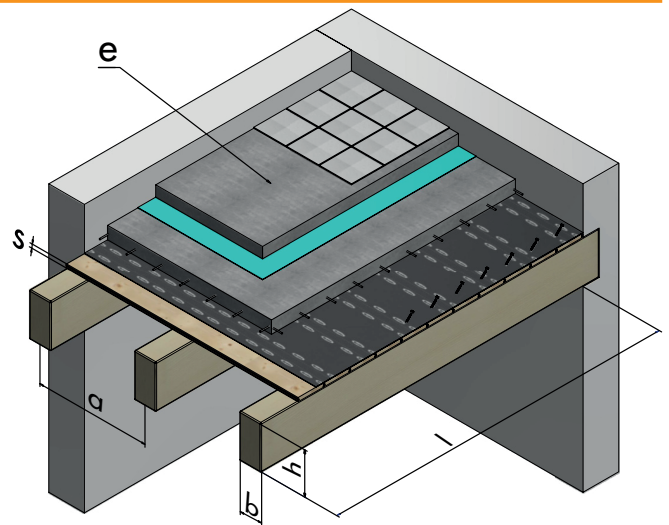

Information about the supporting structure

e Design and dimension of the planned further floor structure

Screed (mm): _____
(Type: e.g. cement/asphalt/dry screed)

Insulating layer (mm): _____

Flooring (mm): _____
(Type: e.g. tiles, parquet, laminate)

Separating wall addition for walls (including plaster) with a load of:

≤ 3 kN/m wall length 0.8 kN/m²

> 3 kN/m ≤ 5 kN/m wall length 1.2 kN/m²

Information about other loads

Loads under the ceiling, e.g. suspended ceilings: _____

Information about the fire stress

R30

R60

R90

R120

Information about use as per DIN EN 1991-1

Living area / office space

Sales space

Meeting room

Note: A preliminary measurement cannot be used to perform the work. The preliminary measurement only relates to the TCC-Integral method from Eurotec that has been approved by the building authorities. Calculation according to EC 5/DIN EN 1995 and EC 2/DIN EN 1992.

Reference: information on the processing of your personal data can be found at the following link: <https://www.eurotec.team/en/data-protection>